

**NEW****HANDHELD IMAGEER****MARS**

# MCR-H270

## High performance New 2D Reader




▶ Soft white auxiliary lighting and green aimer deliver comfortable

▶ Image auto-induction technology supports free switch between handheld and auto-detection modes

▶ Plug-and-play interface enable scanner to be used with different host devices

▶ Stylish and ergonomic design

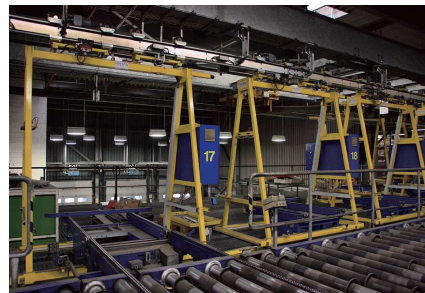

Depth		MCR-270U	MCR-H270U-H
0.08mm	Code39	/	25mm~ 50mm
0.1mm	Code39	30mm~90mm	10mm~90mm
0.5mm	Code39	15mm~340mm	15mm~230mm
0.125mm	DM	/	25~55mm
0.19mm	QR	20~75mm	20~75mm
	DM	20~100mm	20~75mm
0.25mm	QR	20~160mm	20~125mm
	DM	20~155mm	20~150mm
0.5mm	QR	20~300mm	20~240mm

### Specifications

<b>Model</b>	MCR-H270R/U	MCR-H270R-H/U-H
<b>Case Material</b>	PC+TPU	
<b>Cable</b>	Straight 2.0m	
<b>connector</b>	RJ-45 phone jack connector	
<b>Interface</b>	RS-232, or USB Keyboard, USB virtual COM	
<b>Indicator</b>	Beeper and LED	
<b>Trigger mode</b>	Hand-held , Auto-Detect	
<b>Input Voltage</b>	5±0.25 V	
<b>Current</b>	Standby:160mA, Working:300mA(MAX:480mA)	
<b>Image Size</b>	1280 × 800 pixels	
<b>Min Resolution</b>	1D:01mm	1D:0.08mm 2D:0.125mm
	2D:0.19mm	
<b>Light Source</b>	Illumination:5000K,white LED; Aiming:525nm peak wave length, green LED	
<b>Scanning Angle</b>	±70°, ±75°, 360° (Skew, Pitch, Roll)	
<b>Decoding Capability</b>	2D:DataMatrix(ECC200), PDF417, QR Code, MicroQR, MicroPDF, , Customer barcode (optional)	
	1D:JAN/EAN/UPC, ITF, Codabar, Code39, Code93, Code128, EAN128, GS1 Data Bar	
<b>Temperature</b>	Operating:-20°C to 50°C; Storage-20°C to70°C	
<b>Sealing</b>	IP52	
<b>Drop Resistance</b>	Withstands multiple 2.0 m drops to concrete	
<b>Dimensions</b>	90 mm×62.8 mm×153 mm	
<b>Weight</b>	132 g (without cable)	

详情咨询

<https://www.mars-tohken.com.cn>**MTS****MARS TOHKEN(SHANGHAI)ELECTRONICS TRADING CO.,LTD**

231, ZhaoFeng World Trade Building, No.369 jiangsu Road, ChangNing District, Shanghai 200050 China

TEL :+86 21 62414845

<Http://www.mars-tohken.com.cn>